


Our range of Oily Water Separators

The Victor MiniSep range of Oily Water Separators are one of our most popular products, which now includes the latest designed and approved CS Lite OWS unit. This compact and lightweight version of the original MiniSep CS Range is suited to smaller vessels where size, weight and functionality are key factors, whilst still ensuring efficient separation and maximising consumption.

	CS0500	CS1000	CS2000	CS3000	CS4000	CS5000	CS0500 Lite
Capacity m ³ /hr US gal/hr	Up to 0.5 132	1.00 264	2.00 528	3.00 792	4.00 1056	5.00 1320	0.5 132
Dimensions (mm) Width (Inc. Maint.) Depth (Inc. Maint.) Height (Inc. Maint.)	944 (1655) 651 (1090) 1473 (1710)	1269 (2075) 849 (1310) 1473 (1750)	1300 (2075) 832 (1310) 1473 (1750)	1515 (2300) 1046 (1570) 1513 (1760)	1515 (2300) 1046 (1570) 1513 (1760)	1646 (2452) 1045 (1715) 1513 (2000)	1019 (1655) 686 (1090) 1474 (1710)
Weight (Kg) Dry Wet	260 410	500 950	500 950	600 1330	600 1330	770 1650	170 320
Power (kw) 50Hz (60Hz) inc. heater	0.55 (0.55) 1.55 (1.55)	0.75 (0.75) 1.75 (1.75)	1.1 (1.1) 2.1 (2.1)	1.1 (1.3) 2.1 (2.3)	1.5 (1.5) 2.5 (2.5)	1.5 (1.8) 2.5 (2.8)	0.55 (0.55) 1.55 (1.55)
Connections (mm/inch) Inlet Suction Overboard Return to Bilge Recovered oil Flush Valve Pressure Relief	32 (1.25") 25 (1") 25 (1") 25 (1") 15 (0.5") 15 (0.5")	50 (2") 25 (1") 25 (1") 40 (1.5") 15 (0.5") 15 (0.5")	50 (2") 25 (1") 25 (1") 40 (1.5") 15 (0.5") 15 (0.5")	50 (2") 40 (1.5") 40 (1.5") 40 (1.5") 15 (0.5") 20 (0.75")	65 (2.5") 40 (1.5") 40 (1.5") 40 (1.5") 15 (0.5") 20 (0.75")	65 (2.5") 40 (1.5") 40 (1.5") 40 (1.5") 15 (0.5") 25 (1")	32 (1.25") 25 (1") 25 (1") 25 (1") 15 (0.5") 15 (0.5")
Pressure (Bar/psi) Operating Maximum	1.38 (20) 3.45 (50)	1.38 (20) 3.45 (50)	1.38 (20) 3.45 (50)	1.38 (20) 3.45 (50)	1.38 (20) 3.45 (50)	1.38 (20) 3.45 (50)	1.38 (20) 3.45 (50)
Water Requirement	No back-washing required. Clean water required for oil content monitor and commissioning. Recommended pressure 0.5 - 4 bar.						
Air Requirement	Air Pressure of 4-7 bar for operation of pneumatic valves only.						
	CS0500	CS1000	CS2000	CS3000	CS4000	CS5000	CS0500 Lite

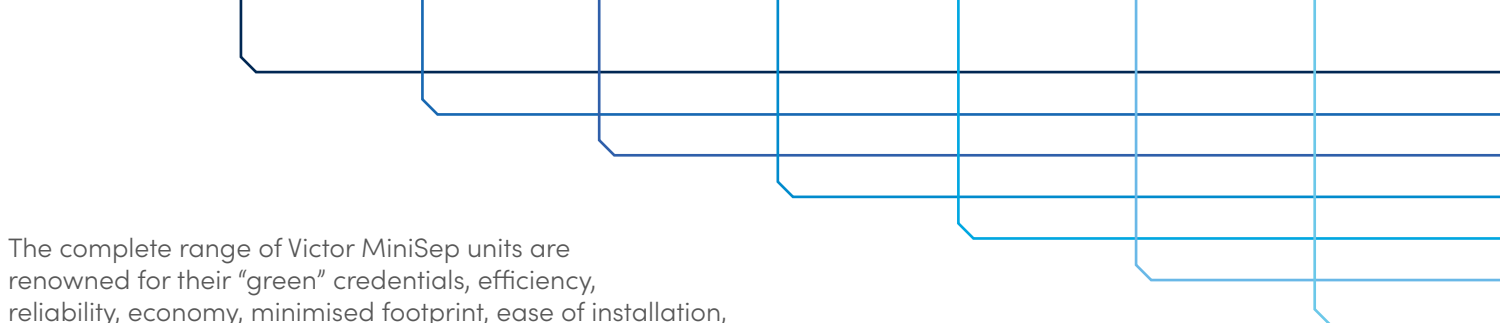

The complete range of Victor MiniSep units are renowned for their "green" credentials, efficiency, reliability, economy, minimised footprint, ease of installation, use and servicing, making the installation and lifespan of the units trouble-free.

Victor Marine have a full in-house engineering and design team, please speak to our sales team about our split base Oily Water Separator systems. Split base units are a unique, low-cost, customer focussed option that allows the CS units to be manufactured in sections, giving easy access of the unit into the ships hold for assembly & installation and eliminate the need to cut into the ships hull. This bespoke & innovative solution can save customers time and money on retro fit projects.