


I Technical specifications

Max.pressure 10 bar (DN 25 - 65 / DN 1" - 2 ½")

8 bar (DN 80 - 100 / DN 3" - 4")

Working temperature -10 °C to +120 °C (EPDM)

Operating torque (N.m.)	25 - 1"	40 - 1 ½"	50 - 2"	2 ½"	65	3"	80	100 - 4"
	8	10	14	15	18	18	20	25

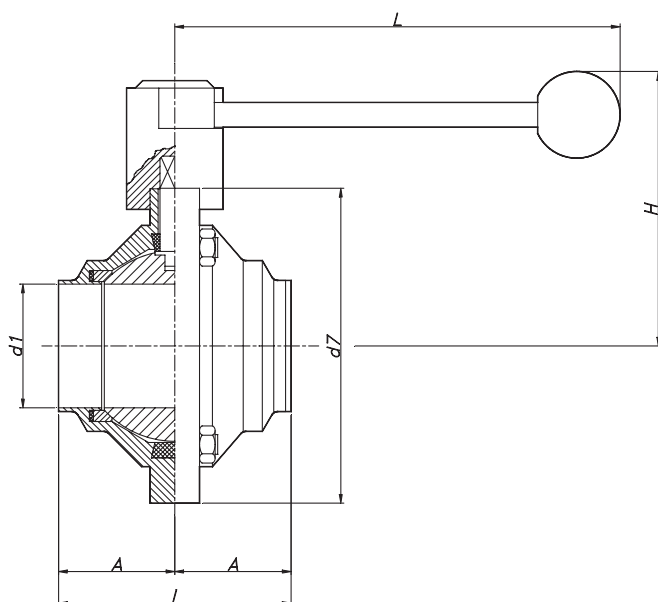

DN	d1	d7	A	I	H	L	AISI 316L/316
25	26	94	36	72	95	150	26400025EB
40	38	114	42	84	104	150	26400040EB
50	50	131	49	98	112	150	26400050EB
65	66	158	60	120	126	180	26400065EB
80	81	181	70	140	142	250	26400080EB
100	100	209	82	164	156	250	26400100EB

DN	d1	d7	A	I	H	L	AISI 316L/316
1"	22,1	94	36	72	95	150	26400010EB
1 ½"	34,9	114	42	84	104	150	264000112EB
2"	47,6	131	49	98	112	150	264000200EB
2 ½"	60,3	158	60	120	126	180	264000212EB
3"	72,9	181	70	140	142	250	264000300EB
4"	97,4	209	82	164	156	250	264000400EB