


Mounting Template:

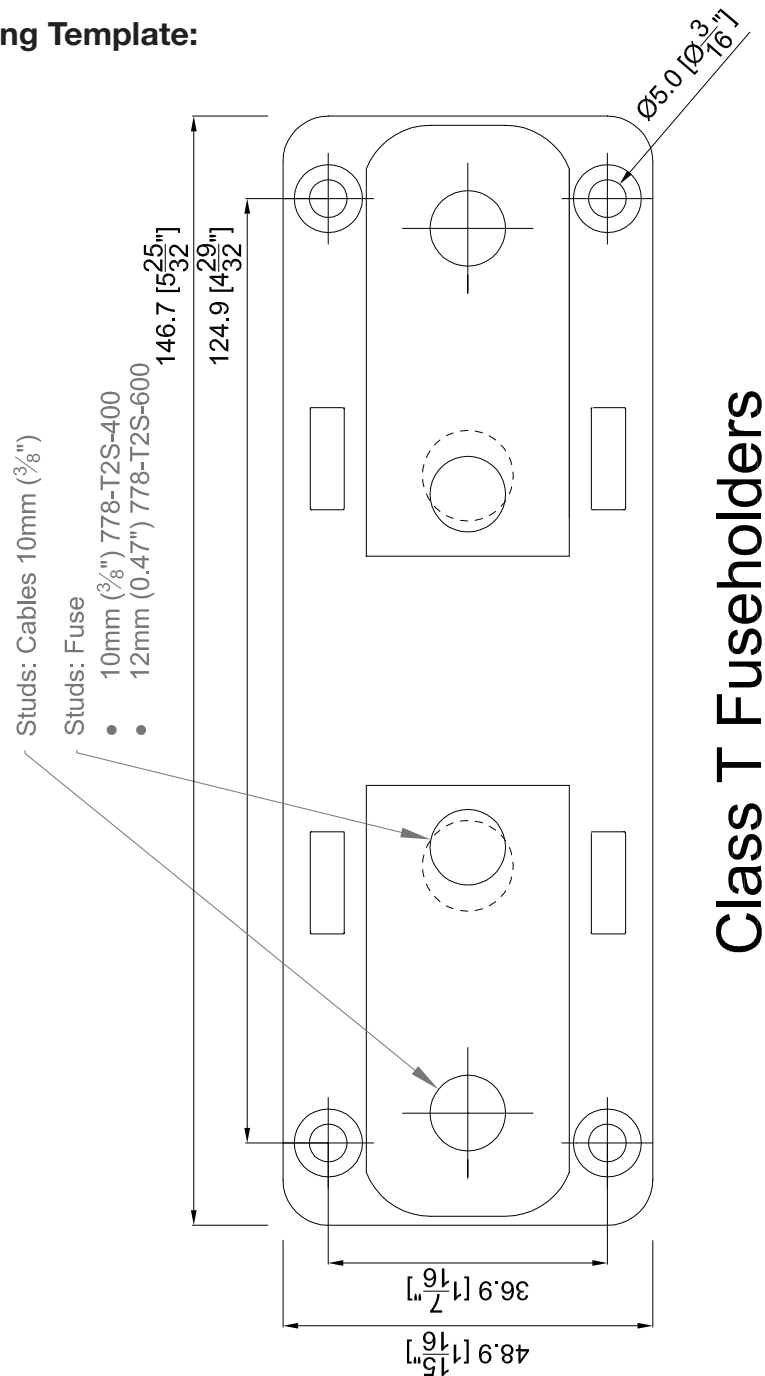

Product	Dimensions (mm)	Dimensions (Inches)	Weight (Grams)	Weight (oz)
ClassT Holder 225-400A	147 x 49 x 61 mm	5.8 " x 1.9" x 2.4"	351g	12.4 oz
ClassT Holder 450-600A	147 x 49 x 61 mm	5.8 " x 1.9" x 2.4"	382g	13.5 oz

INST-778-B3

MARINCO
BEP PRODUCTS



Class T Fuseholder Range

778-T2S-400 Class T Fuseholder, 225 - 400A
778-T2S-600 Class T Fuseholder, 450 - 600A

Modular

Class T
Fuseholders-1.5x

1.0x 0.5x

Footprint



Pro Installer Class T Fuseholders provide high-capacity fusing, with very fast response and very high interrupt ratings (Class-T 20,000 - 50,000 Amps interrupt). These are ideal for protecting today's demanding onboard power electronics technology including inverters and battery chargers. They also protect wiring from short circuits, for example as a main fuse to protect house circuits, where modern battery technologies such as Lithium Ion and AGM are capable of producing very high short circuit currents.

Specifications:

- Cable connection studs: 10mm (3/8") studs
- Fuse amperage and mounting studs:
 - 778-T2S-400: 225-400A, stud 10mm (3/8")
 - 778-T2S-600: 450-600A, stud 12mm (0.47")
- Fuse type: Class T (JJN / TJN / JLLN / A3T)
- 50 VDC
- High temperature, fibre reinforced plastic base provides strength and chemical resistance
- Clear polycarbonate cover
- Tinned CDA102 copper conductors, stainless steel studs and nuts, for longevity in the marine environment
- All threads are metric